




PL1 TYPE

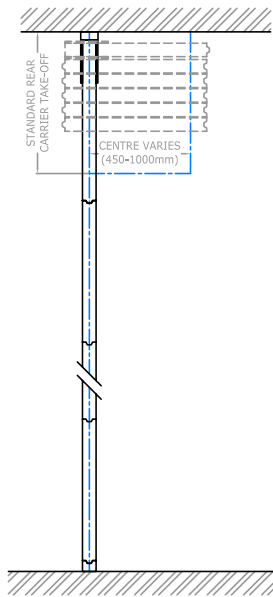


PL2 TYPE

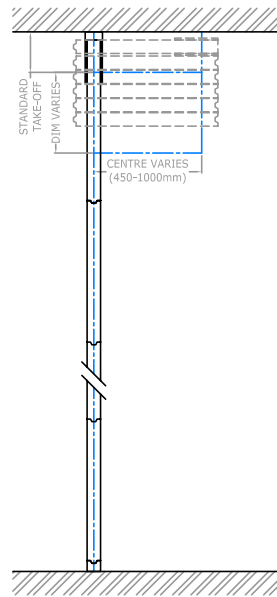


PL3 TYPE

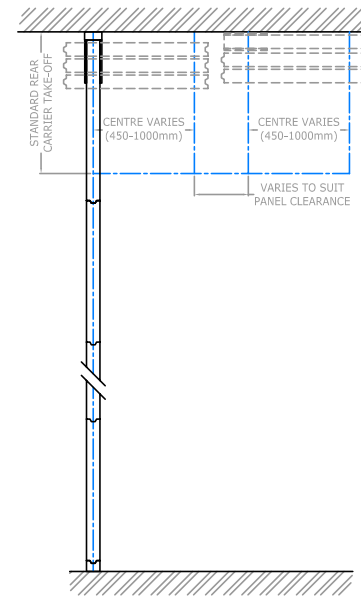


PL4 TYPE

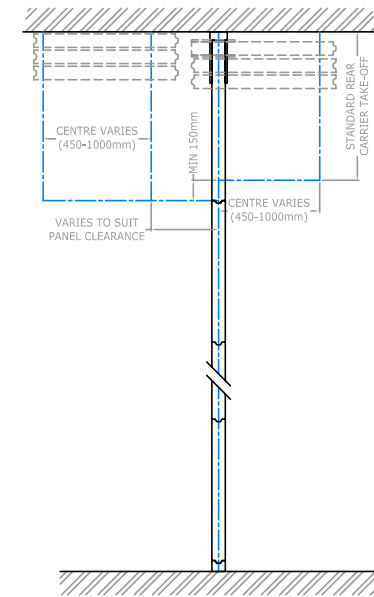


PL5 TYPE

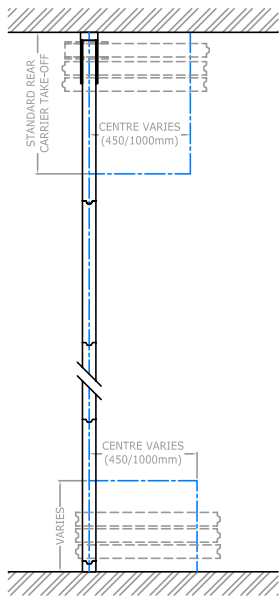


PL6 TYPE

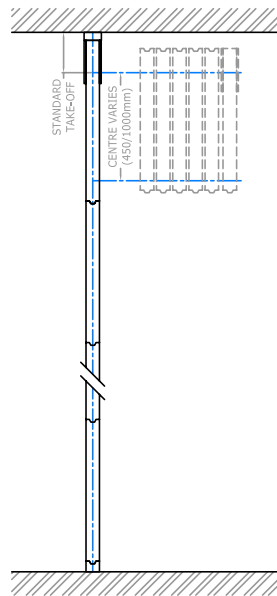


PL7 TYPE

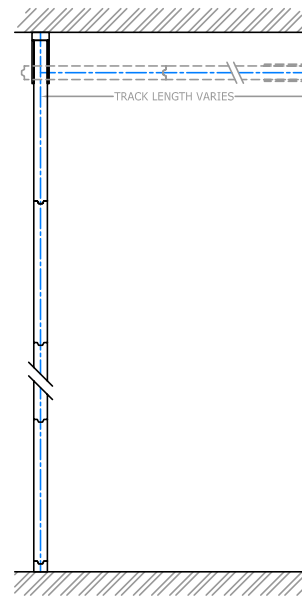

PL8 TYPE



PL9 TYPE

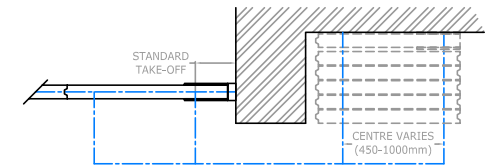

PL10 TYPE

- NOTES:**
1. PARKING LAYOUT PL1 (SINGLE POINT SUSPENSION) ONLY POSSIBLE WITHIN THE OPENING (EITHER ONE END OR BOTH ENDS)
  2. A 20mm TRACK DOWNSTAND IS REQUIRED FOR SINGLE POINT SUSPENSION SYSTEMS - SEE STY-SD-02 FOR DETAILS
  3. FLUSH TRACK ONLY POSSIBLE WITH 2-POINT SUSPENSION SYSTEMS - SEE STY-SD-02 FOR DETAILS
  4. OTHER SOLUTIONS ARE AVAILABLE - PLEASE CONTACT STYLE FOR DETAILS
- PLEASE SEE OUR WEBSITE FOR FURTHER DETAILS - [www.style-partitions.co.uk](http://www.style-partitions.co.uk)

TITLE: COMMON PARKING LAYOUTS (PL) - TYPE R TRACK

DWG No: STY-SD-01-01

DATE: 07.02.2012

REV: -

**style**  
moveable partition specialists